

Physics of light

© 1999, Denis Zorin

Local Illumination model

interaction of light with the surface

Need to know

- how to measure light
- how to describe surface properties
- computer representation

© 1999, Denis Zorin

Properties of light

- spectrum (energy per wavelength)
- polarization
- coherence

Radiometry: physical properties

Photometry: perceptual properties

Visible wavelengths: 380 nm - 770 nm

© 1999, Denis Zorin

Basic Units

Force:

Newton = kg · m/sec²

Energy:

joule = Newton · m


Power:

watt = joule/sec

To get "standard" eye response, integrate spectrum (energy as function of wavelength) multiplied by relative efficiency.

Luminous energy: talbot;

Luminous power: lumen = talbot/sec



© 1999, Denis Zorin

Photometry and Radiometry

Radiometry units are primary. If the spectrum of light $P(\lambda)$ (measured in watts/nm) is known, then luminous power is computed as

$$684 \int V(\lambda) P(\lambda) d\lambda$$

684 is an arbitrary constant measured in lumens/watt (luminosity at the wavelength 555 nm, yellow-green). If most of the energy of a light source is near 555nm, then to convert from watts to lumens multiply by 684.


© 1999, Denis Zorin

Flow of light

Assumptions:

light consists out of particles (ignore wave nature)
propagates along straight rays (isotropic medium)

Flow:



N particle density

dA differential area

v particle velocity

© 1999, Denis Zorin

Flux and Flux Density

Flux = particles/unit time; differential flux through a small area:


$$d\Phi = N v \cos \theta dA$$

Flux density = particles/(unit time unit area)

$$\frac{d\Phi}{dA} = N v \cos \theta$$

© 1999, Dennis Zarlin

Solid Angles



solid angle spanned by a cone is measured by the area of intersection of the cone with a sphere:

$$\Omega = \frac{A}{R^2}$$

differential solid angle can be assigned a direction. Unit: steradian (full sphere = 4π)

© 1999, Dennis Zarlin

Measuring light

For any point in space, we can consider directional distribution of photons going through a differential area at this point.

Radiance: energy per unit time, per unit differential area perpendicular to the ray, per unit solid angle in the direction of the ray.

Measured in watts/meter²/steradian

If $\phi(x, \omega) = \frac{dN}{d\Omega}$ is directional distribution of

photons of wavelength λ , going through the area

then radiance is $L(x, \omega, \lambda) = \frac{hc}{\lambda} \phi(x, \omega)$
energy of a photon

© 1999, Dennis Zarlin

Constancy of Radiance



radiance is constant along a ray: consider the flow of photons in a thin pencil; the number of photons entering on the right with the direction inside $d\omega_1$ exit through the other side; equating the expressions for entering and exiting diff. flows we get

$$d\Phi_1 = L_1 d\omega_1 dA_1 = L_2 d\omega_2 dA_2 = d\Phi_2$$

$$\text{but } dA_1 d\omega_1 = dA_2 d\omega_2 \text{ so } L_1 = L_2$$

© 1999, Dennis Zarlin

BRDF

irradiance: light flow per unit area of surface

flow of radiance L spanning solid angle $d\omega_i$ creates differential irradiance $L d\omega_i \cos \theta_i$

bidirectional reflectance distribution function:

the ratio of reflected radiance in direction r to the differential irradiance in the direction i

units: steradians⁻¹

$$f(\omega_i, \omega_r) = \frac{dL_r(\omega_i, \omega_r)}{L_i \cos \theta_i d\omega_i}$$


© 1999, Dennis Zarlin

Reflection equation

the outgoing radiance in direction r is the sum of the radiances due to radiance from all incoming directions:


$$L_r(\omega_r) = \int f_r(\omega_i, \omega_r) L_i(\omega_i) \cos \theta_i d\omega_i$$

the integral is over the upper hemisphere



© 1999, Dennis Zarlin

Reflection geometry



$$\mathbf{V} = \omega_r, \mathbf{L} = \omega_i$$

$$\mathbf{R} = \mathbf{L} + 2(\mathbf{L} \cdot \mathbf{N})\mathbf{N}$$

© 1999, Denis Zorin

Phong model

1"BRDF"

$$f_r(\omega_i, \omega_r) = K_{diff} + K_{spec}(\omega_i \cdot \omega_r)^p$$

Point light source intensity: power per unit solid angle

intensity in a direction ω : $I(\omega) = \frac{d\Phi}{d\omega}$

radiance created by light source at distance r

in the direction of the source: $L(\omega, r) = \frac{I(\omega)}{r^2}$

To avoid integration in the reflection equation, ignore radiance from all directions except a finite number (e.g. direction to the light sources).

© 1999, Denis Zorin

Phong model

Phong model and Z-buffer rendering:

- assume point light sources; ignore irradiance from all directions except the directions to the lights;
- ignore occlusions, that is, no shadows).

Phong model and (classical) ray tracing:

- consider reflection and transmission;
- take occlusions into account.

© 1999, Denis Zorin

Phong model

$$L(\mathbf{V}) = K_{amb}L_{amb} + \sum_i L_i (K_{diff}(\mathbf{L}_i \cdot \mathbf{N}) + K_{spec}(\mathbf{R}_i \cdot \mathbf{V})^p)$$

summation is over all light sources.


Ambient term: a hack. Because we ignore diffuse reflected light from objects (e.g. walls) the resulting images are often too dark.

Another hack: replace $L_i = \frac{I_i}{r^2}$ with $\frac{I_i}{d_c + d_l r + d_q r^2}$

© 1999, Denis Zorin

Phong model

Directional plots of BRDF for a fixed incoming direction for different (K_{diff}, K_{spec}, p)

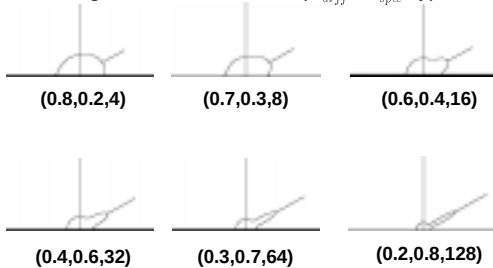

© 1999, Denis Zorin

Constants and units

K_{diff}, K_{spec} reflection coefficients, 3 color components

p Phong exponent, nondimensional, same for all colors

L, L_{amb} watts/meter²/steradian, 3 color components

I_i light source intensity, 3 color components

© 1999, Denis Zorin

OpenGL model

Several additions:

ambient term per object;
emission;
ambient, diffuse, specular light “intensities”

Setting material parameters (K_{diff} , K_{spec} , $K_{ambient}$)

GLfloat mat_diffuse[3], mat_spec[3], mat_amb[3];
GLfloat shininess;

...

glMaterialfv(GL_FRONT, GL_DIFFUSE, mat_diffuse);
glMaterialfv(GL_FRONT, GL_SPECULAR, mat_spec);
glMaterialfv(GL_FRONT, GL_AMBIENT, mat_amb);

© 1999, Denis Zorin

Lighting model for ray tracing

New effects: reflection, refraction; need more terms

reflection part:

$$L_1(\mathbf{V}) = \sum_{\substack{\text{visible sources} \\ \text{in front}}} L_i (K_{diff}(\mathbf{L}_i \cdot \mathbf{N}) + K_{spec}(\mathbf{R}_i \cdot \mathbf{V})^p) + k_{refl} L_{refl}$$

radiance from the reflected ray

$$L_2(\mathbf{V}) = \sum_{\substack{\text{visible sources} \\ \text{behind}}} L_i (K_{diff}(\mathbf{L}_i \cdot \mathbf{N}) + K_{spec}(\mathbf{T}_i \cdot \mathbf{V})^p) + k_{trans} L_{trans}$$

radiance from the refracted ray

$$L(\mathbf{V}) = K_{amb} L_{amb} + (1 - t) L_1(\mathbf{V}) + t L_2(\mathbf{V})$$

t is transparency

© 1999, Denis Zorin